


Technical Specification

Frequency Range1(MHz)	2500 – 2570
Frequency Range2(MHz)	2620 – 2690
Insertion Loss(dB)	1.5 max
Isolation(dB)	60 min
Ripple(dB)	0.7 max
Return Loss(dB)	17 min on all port
Impedance(ohms)	50
Connector	SMA-Female
Operating Temperature(°C)	-30 ~ +70
Net Weight(Kg)	0.32 Around

Outline Drawing (Size: mm)

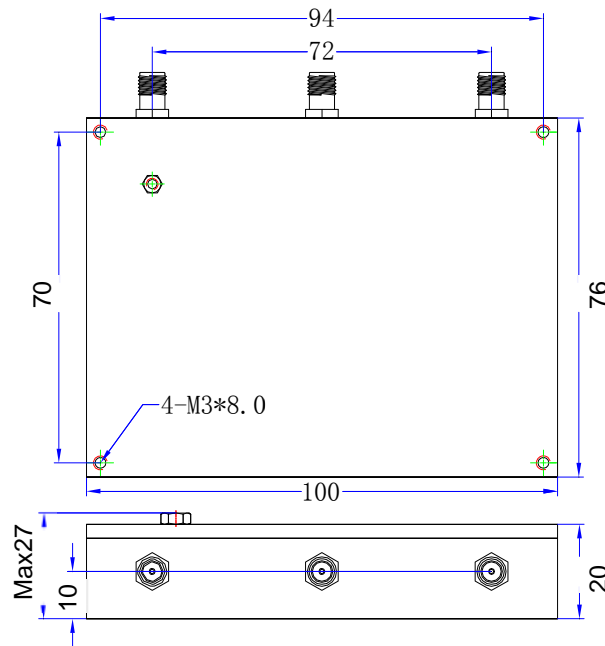

Test Results

Frequency Range(MHz)	Insertion Loss(dB)	Return Loss(dB)	Isolation(dB)
2500 – 2570	0.95	21	65
2620 – 2690	0.82	22	65