


Technical Specification

Frequency Range1(MHz)	746 – 756
Frequency Range2(MHz)	777 – 787
Insertion Loss(dB)	1.5 max
Isolation(dB)	60 min
Ripple(dB)	0.5 max
Input Power(W)	10 CW
Return Loss(dB)	17 min
Impedance(ohms)	50
Connector	N- Female
Operating Temperature(°C)	-40 ~ +70
Net Weight(Kg)	0.86 Around

Outline Drawing (Size: mm)

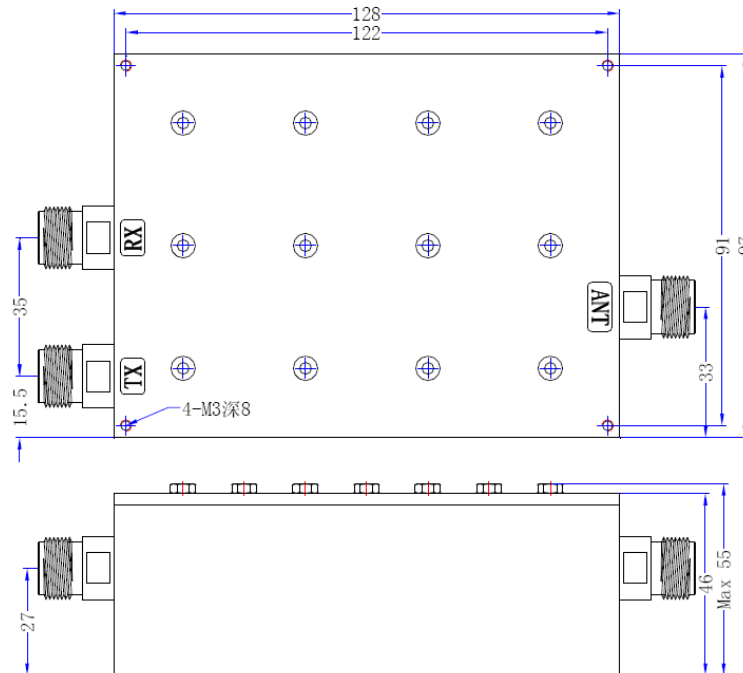

Test Results

Frequency Range(MHz)	Insertion Loss(dB)	Return Loss(dB)	Isolation(dB)
746 – 756	0.77	20.1	71.8
777 – 787	0.78	22.0	74.6