


Technical Specification

	Pass Band 1	Pass Band 1
Frequency Range(MHz)	880 – 915	925 – 960
1dB Bandwidth(MHz)	35 min	35 min
Insertion Loss(dB)	1.0 max	1.0 max
Return Loss(dB)	18 min	18 min
Isolation Rx/Tx(dB)	60 min	
Impedance(ohms)	50	
Power(W)	50	
Port Connectors	SMA-Female	
Operating Temperature(°C)	-20 ~ +70	
Storage Temperature(°C)	-40 ~ +85	
Net Weight(Kg)	1.44 Around	

Outline Drawing (Size: mm)

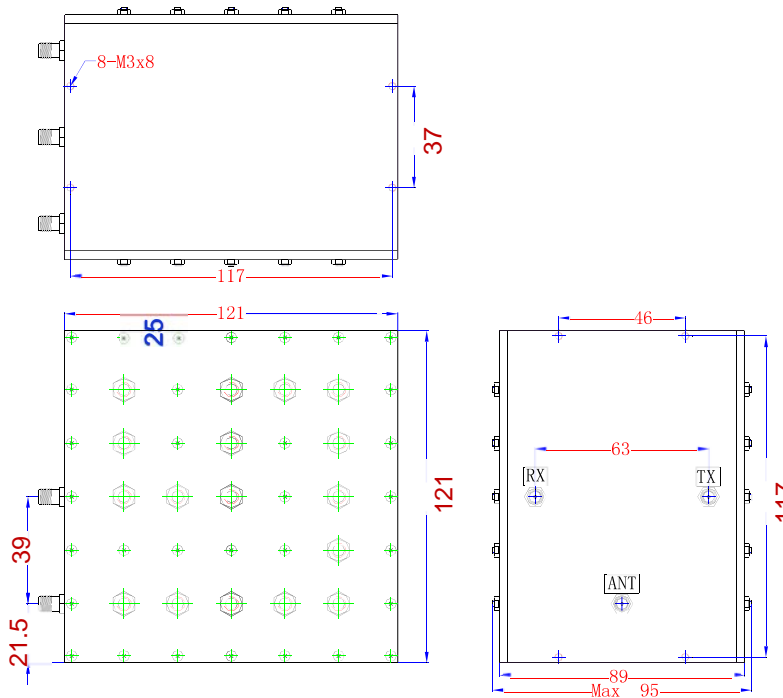

188 Technology Dr. Unit H, Irvine, CA 92618

Tel: 949-453-9888, FAX: 949-453-8889, Email: Sales@aacix.com



Test Results

ANT-RX		ANT-TX		Isolation(dB)	
880-915MHz		925-960MHz		880-915MHz	925-960MHz
Insertion Loss (dB)	Return Loss (dB)	Insertion Loss (dB)	Return Loss (dB)		
0.94	21	0.93	20	69	71

188 Technology Dr. Unit H, Irvine, CA 92618

Tel: 949-453-9888, FAX: 949-453-8889, Email: Sales@aacix.com