


Technical Specification

Frequency Range(MHz)	470-480
Insertion Loss(dB)	0.3 max
Isolation(dB)	25 min
Forward Power(W)	400 CW,600 peak
Reverse Power(W)	2-4 CW
VSWR	1.2 max
Package	Drop-in
Operating Temperature(°C)	-40~+70
Size(mm)	35x38x13
Net Weight(Kg)	0.095 Around




Outline Drawing (Size: mm)

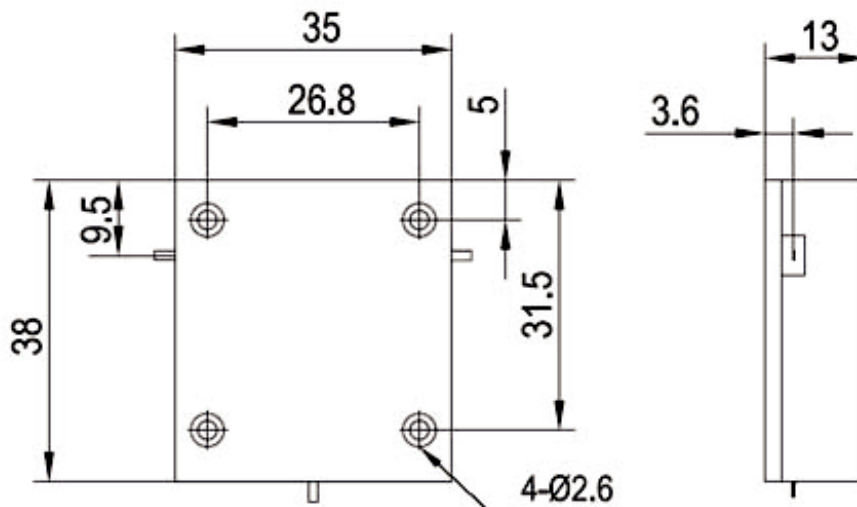


Test Results

Port1~2

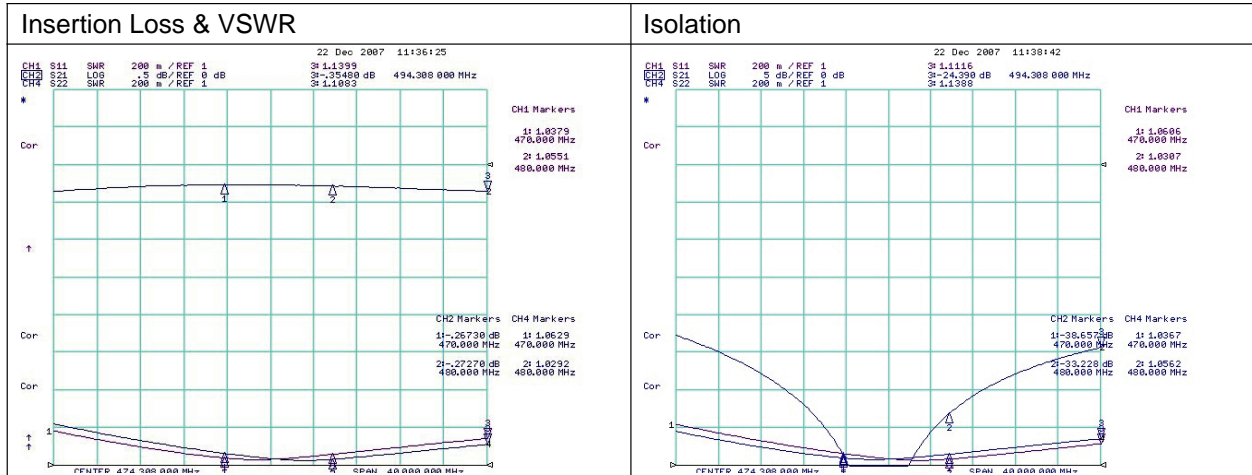

Port2~3

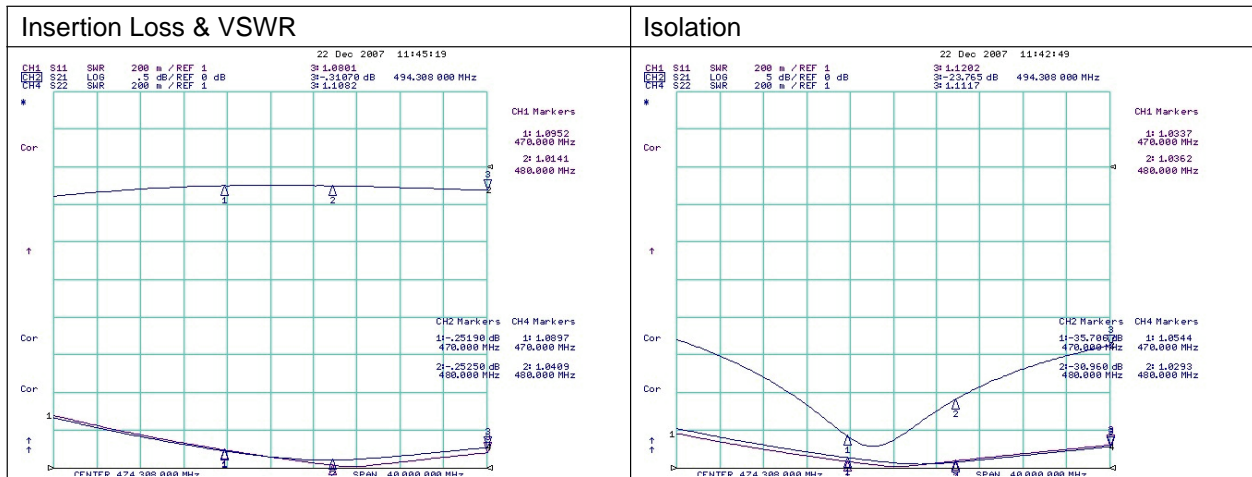

Port3~1

