


Technical Specification

Frequency Range(GHz)	2 – 4
Isolation(dB)	17 min
Insertion Loss(dB)	0.55 max
VSWR	1.35 max
Input Power(W)	10 CW
Operating Temperature(°C)	-10 - +65
Connectors	SMA-Female
Net Weight(kg)	0.090 Around



Outline Drawing (Size: mm)

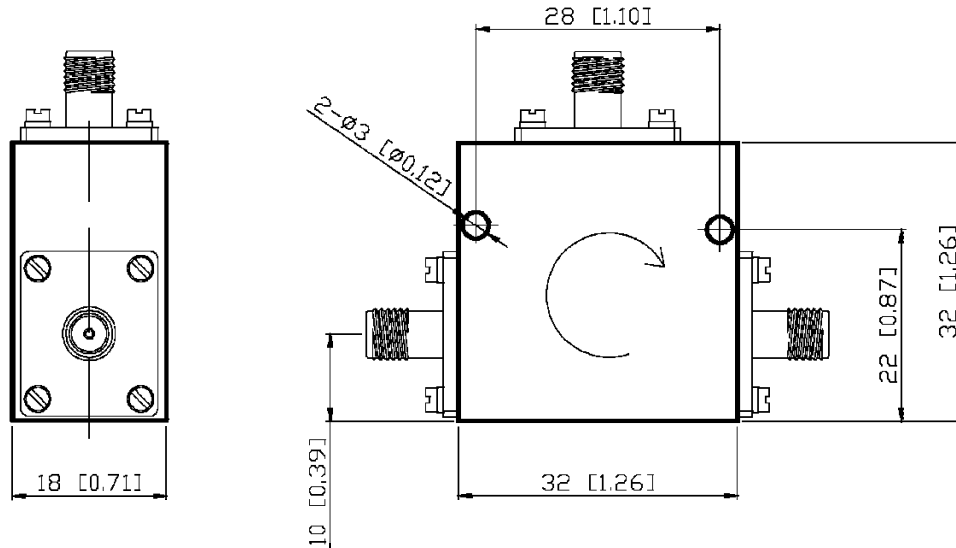

Test Results

Frequency(GHz)	Isolation (dB)	VSWR	Insertion Loss(dB)
2.0-4.0	18.6	1.33	0.54