


Technical Specification

Frequency Range(MHz)	2200-2800
Insertion Loss(dB)	0.35 max
Isolation(dB)	20 min
Power(dBm)	25 max
VSWR	1.25 max
Direction	Clockwise
Connector	SMA-Female
Temperature Range(°C)	-20~+60
Net Weight(Kg)	0.05 Around



Outline Drawing (Size: mm)

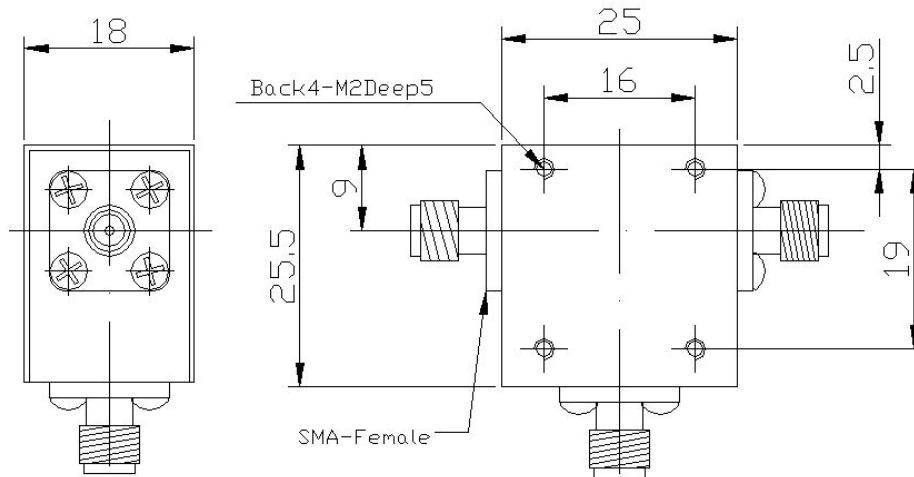

Test Results

Frequency Range(MHz)	Insertion Loss(dB)	Isolation(dB)	VSWR-1	VSWR-2	VSWR-3
2200-2800	0.28	22	1.18	1.20	1.20