


Technical Specification

Frequency Range(MHz)	300-500
Insertion Loss(dB)	1.0 max
Isolation(dB)	15 min
Power Handling(W)	50
VSWR	1.4 max
Connector	SMA-Female
Operating Temperature(°C)	-40~+70
Net Weight(Kg)	0.28 Around



Outline Drawing (Size: mm)

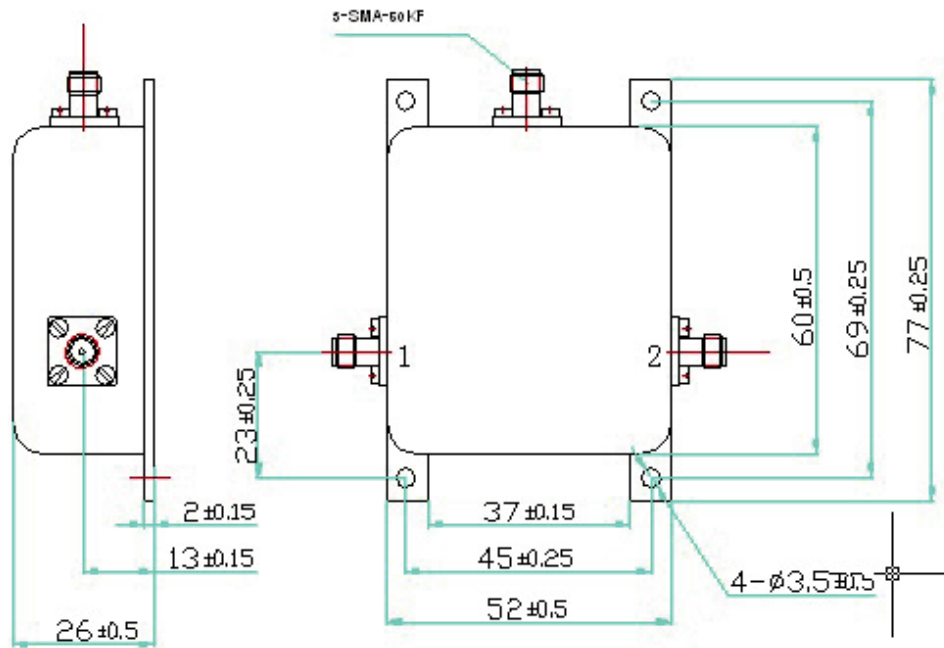

Test Results

Frequency Range(MHz)	Insertion Loss(dB)	VSWR	Isolation(dB)
300-500	0.95	1.37	17.6