


Technical Specification

Frequency Range(MHz)	360-440
Insertion Loss(dB)	0.6 max
Isolation(dB)	20 min
Forward Power(W)	5
VSWR	1.25 max
Connector	N-Female
Operating Temperature(°C)	-20~+70
Size(mm)	45 x 50 x 26
Net Weight(Kg)	0.295 Around



Outline Drawing (Size: mm)

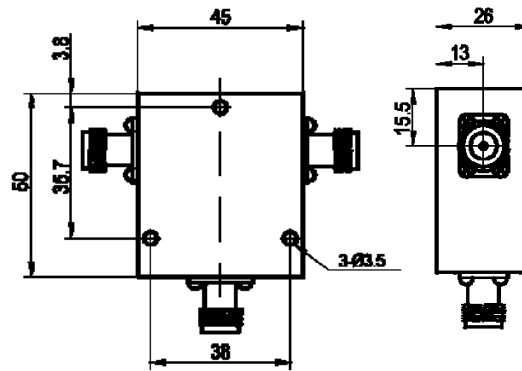

Test Results

