


## Technical Specification

Frequency Range(MHz)	10-500
Switch Type	Absorptive
Insertion Loss(dB)	1.6max
VSWR	1.4 max
Isolation(dB)	80 min
RF Power(dBm)	20 max
Impedance(Ohms)	50
Control	TTL("0" OFF, "1" Thru)
Switching Speed(ms)	0.5
DC Power(V)	+5@150mA max;-5@150mA max
Connector	SMA-Female(Removable)
Operating Temperature(°C)	-40 ~ +70
Storage Temperature (°C)	-55 - +85
Net Weight(Kg)	0.065 Around

## Outline Drawing (Size: mm)

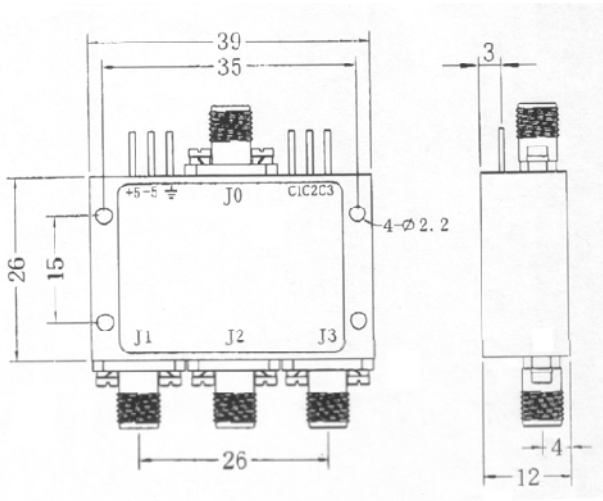

## Test Results

Port	Frequency Range (MHz)	Insertion Loss (dB)	VSWR	Isolation (dB)
J0~J1	10-500	0.88	1.26	91
J0~J2	10-500	0.79	1.25	85
J0~J3	10-500	0.86	1.25	90