



Technical Specification

Frequency Range(MHz)	20-600
Switch Type	Absorptive
Insertion Loss(dB)	1.8 max
VSWR	1.4 max
Isolation(dB)	80 min
RF Power(dBm)	20 max
Impedance(Ohms)	50
Control	TTL("0" OFF, "1" Thru)
Switching Speed(ms)	0.5
DC Power(V)	+5@150mA max;-5@150mA max
Connector	SMA-Female(Removable)
Operating Temperature(°C)	-40 ~ +70
Storage Temperature (°C)	-55 - +85
Net Weight(Kg)	0.085 Around

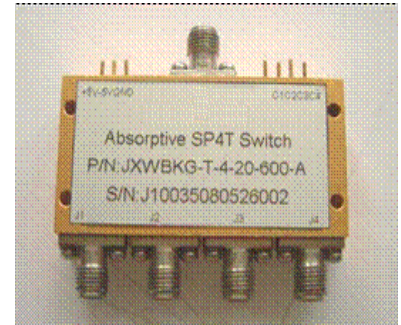

Outline Drawing (Size: mm)

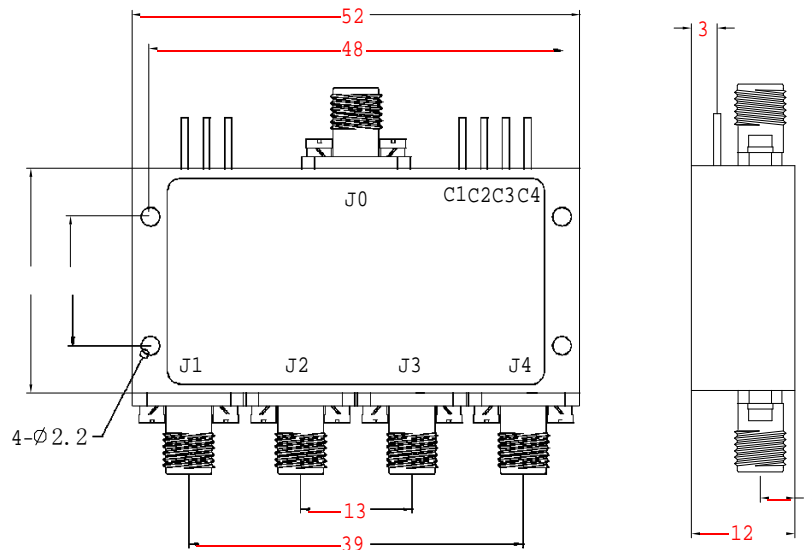

Test Results

Port	Frequency Range (MHz)	Insertion Loss (dB)	VSWR	Isolation (dB)
J0~J1	20-600	0.83	1.29	87
J0~J2	20-600	0.83	1.30	88
J0~J3	20-600	0.95	1.33	90
J0~J4	20-600	1.09	1.25	92