



Features

This flat type attenuator uses Ta₂N for resistive elements ensuring high stability and excellent frequency performance.

Application

Coaxial Tube

Dimensions

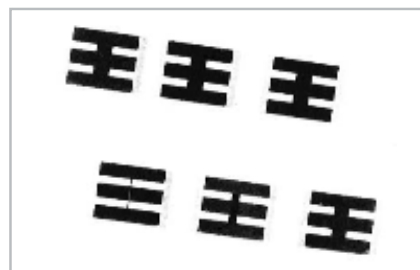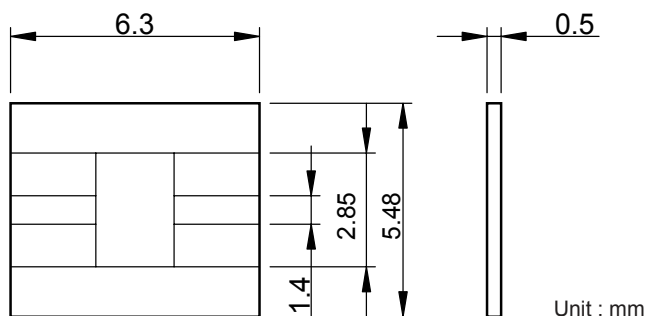

Electrical Specifications

Style No.	Attenuation [dB]		VSWR max.		Ambient Temp.	Rated Power	Impedance	Working Temp. Range
	DC ~ 12.4 GHz	12.4 ~ 18 GHz	DC~12.4 GHz	12.4~18 GHz				
TRK-7003	3±0.5	3±0.8	1.20	1.30	70 C	1 / 2 W	50 Ω	-55 ~ +125 C
TRK-7006	6±0.8	6±0.9						
TRK-7010	10±1.0	10±1.2						
TRK-7020	20±1.0	20±1.2						