



THIN FILM PRECISION CHIP RESISTOR

HOW TO ORDER

CT 10 - 1003 B X M

Packaging
M = Stand Reel O = Cutting Tape


TCR (PPM/°C)
L = ±1 P = ±5 Y = ±50
M = ±2 Q = ±10 Z = ±100
N = ±3 X = ±25

Tolerance (%)
U=±0.01 A=±0.05 C=±0.25 F=±1
P=±0.02 B=±0.10 D=±0.50

EIA Resistance Value
Standard Decade Values

Size
0201=20 0402=05 0603=16
0603P=16P 0805=10 0805P=10P
1206=18 1206P=18p 1210=14
1217=13 2010=12 2020=11
2045=09 2512=01

Series
CT = Lead Free Thin Film Precision Resistor
Sn Termination

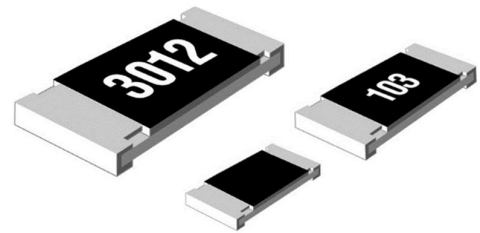


FEATURES

- High Power Available 0603P 1/8W, 0805P 1/4W, 1206P 1/2W
- Nichrome Thin Film Resistor Element
- Anti-Leaching Nickel Barrier Terminations
- Very Tight Tolerances, as low as ±0.01%
- Extremely Low TCR, as low as ±1ppm
- Reference Standard = IEC 60115-8, JIS C 5201-8
- RoHs Compliance 2011/65/EU

SCHEMATIC

Wraparound Termination




DIMENSIONS

Size	L	W	c	d	t
0201	0.60 ± 0.05	0.30 ± 0.05	0.13 ± 0.05	0.25 ± 0.05	0.25 ± 0.05
0402	1.00 ± 0.05	0.5 ± 0.1 ^{-0.05}	0.20 ± 0.10	0.25 ± 0.05 ^{-0.10}	0.35 ± 0.05
0603, P	1.60 ± 0.10	0.80 ± 0.10	0.20 ± 0.10	0.30 ± 0.20 ^{-0.10}	0.50 ± 0.10
0805, P	2.00 ± 0.15	1.25 ± 0.15	0.40 ± 0.25	0.30 ± 0.20 ^{-0.10}	0.50 ± 0.15
1206, P	3.20 ± 0.15	1.60 ± 0.15	0.45 ± 0.25	0.40 ± 0.20 ^{-0.10}	0.60 ± 0.15
1210	3.20 ± 0.15	2.60 ± 0.15	0.50 ± 0.30	0.40 ± 0.20 ^{-0.10}	0.60 ± 0.10
1217	3.00 ± 0.20	4.20 ± 0.20	0.80 ± 0.30	0.80 ± 0.25	0.9 max
2010	5.00 ± 0.15	2.60 ± 0.15	0.50 ± 0.30	0.40 ± 0.20 ^{-0.10}	0.70 ± 0.10
2020	5.08 ± 0.20	5.08 ± 0.20	0.80 ± 0.30	0.80 ± 0.30	0.9 max
2045	5.00 ± 0.15	11.5 ± 0.30	0.80 ± 0.30	0.80 ± 0.30	0.9 max
2512	6.30 ± 0.15	3.10 ± 0.15	0.60 ± 0.25	0.50 ± 0.25	0.60 ± 0.10

CONSTRUCTION MATERIALS

Item	Part	Material
①	Resistor	Nichrome Thin Film
②	Protective Film	Polymide Epoxy Resin
③	Electrode	
③a	Grounding Layer	Nichrome Thin Film
③b	Electrode Layer	Copper Thin Film
③c	Barrier Layer	Nickel Plating
③d	Solder Layer	Solder Plating (Sn)
④	Substrate	Alumina
⑤ & ⑥	Marking	Epoxy Resin
	The resistance value is on the front side	
	The production month is on the backside	

CONSTRUCTION FIGURE (Wraparound)

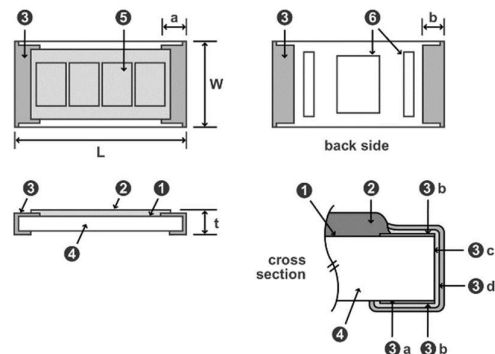



American Accurate Components, Inc.

196 Technology Dr. Ste E, Irvine, CA 92618, U.S.A

Tel: +1 949-453-9888 | Email: sales@aacix.com | Website: www.aacix.com

ELECTRICAL CHARACTERISTICS							
Size	Power Rating at 70° (W)	Resistance Range	±% Tolerance	TCR (10 ⁻⁶ /°C)	Working Voltage	Overload Voltage	Operating Temp Range
0201	0.05	22 ~ 75K	0.1, 0.5, 1.0	±25 ±50 ±100	25V	50V	-55°C ~ +125°C
		1K ~ 10K	0.05	±10			
0402	0.063	10.0 ~ 46.4	0.1, 0.5, 1	±10, ±25, ±50	50V	100V	-55°C ~ +125°C
		47.0 ~ 97.6	0.05, 0.1, 0.25, 0.5, 1	±10, ±25, ±50			
		100 ~ 2.94K	0.02, 0.05, 0.1, 0.25, 0.5, 1	±5, ±10, ±25, ±50			
		3.00K ~ 100K	0.05, 0.1, 0.25, 0.5, 1	±10, ±25, ±50			
0603	0.063 0.100	10.0 ~ 100K	0.01, 0.02, 0.05, 0.1, 0.25, 0.5, 1	1,2,3,5,10,25,50	75V	150V	-55°C ~ +125°C
		102K ~ 270K	0.05, 0.1, 0.25, 0.5, 1	10, 25, 50			
		274K ~ 360K	0.1, 0.25, 0.5, 1	10, 25, 50			
0603P	0.125	1.0 - 9.1	0.5, 1	±50, ±100	75V	150V	-55°C ~ +125°C
		10 - 390K	0.1, 1.0	±10, ±25, ±50, ±100			
0805	0.100	10.0 ~ 200K	0.01, 0.02, 0.05, 0.1, 0.25, 0.5, 1	1, 2, 3, 5, 10, 25, 50	100V 150V	200V 300V	-55°C ~ +125°C -55°C ~ +125°C
		205K ~ 360K	0.05, 0.1, 0.25, 0.5	10, 25, 50			
		365K ~ 487K	0.05, 0.1, 0.25, 0.5	10, 25			
		499K ~ 1.00M	0.1, 0.5	25			
0805P	0.250	1.0 - 9.1	0.5, 1	±50, ±100			
		10 - 800K	0.1, 1.0	±10, ±25, ±50, ±100			
1206	0.125	5.01 ~ 560K	0.01, 0.02, 0.05, 0.1, 0.25, 0.5, 1	1, 2, 3, 5, 10, 25, 50	150V	300V	-55°C ~ +125°C
		562K ~ 1.00M	0.05, 0.1, 0.25, 0.5	10, 25			
1206P	0.500	1.0 - 9.1	0.5, 1	±50, ±100	150V	300V	-55°C ~ +125°C
		10 ~ 1.00M	0.1, 1.0	±10, ±25, ±50, ±100			
1210	0.250	100 ~ 330K	0.1	±5, ±10	200V	400V	-55°C ~ +125°C
		51.0 ~ 2.00M	0.1, 0.5	±25			
		10.0 ~ 49.9	0.5	±50			
1217	0.250	5.10 ~ 1.00M	0.01, 0.02, 0.05, 0.1, 0.25, 0.5, 1	±1, 2, 3, 5, 10, 25	200V	400V	-55°C ~ +155°C
2010	0.250	100 ~ 20.0K	0.01, 0.05, 0.1, 0.25, 0.5	±5	150V	300V	-55°C ~ +125°C
		50.0 ~ 40.0K	0.01, 0.05, 0.1, 0.25, 0.5	±10			
		10.0 ~ 500K	0.01, 0.05	±25			
		4.70 - 1.00M	0.1, 0.25, 0.5, 1				
		10.0 ~ 500K	0.01, 0.05	±50			
2020	0.500	5.10 ~ 2.00M	0.01, 0.02, 0.05, 0.1, 0.25, 0.5, 1	±1, 2, 3, 5, 10, 25	350V	700V	-55°C ~ +155°C
2045	1.000	20.0 ~ 4.99M	0.01, 0.02, 0.05, 0.1, 0.25, 0.5, 1	±1, 2, 3, 5, 10, 25	500V	1000V	-55°C ~ +155°C
2512	0.500	100 ~ 20.0K	0.01, 0.05, 0.1, 0.25, 0.5	±5	150V	300V	-55°C ~ +125°C
		50.0 ~ 40.0K	0.01, 0.05, 0.1, 0.25, 0.5	±10			
		10.0R ~ 500K	0.01, 0.05	±25			
		4.70 - 1.00M	0.1, 0.25, 0.5, 1				
		10.0R ~ 500K	0.01, 0.05	±50			
		1.00 1.00M	0.1, 0.25, 0.5, 1				

* Rated Voltage: $\sqrt{P \times R}$

PERFORMANCE & ENVIRONMENTAL SPECIFICATIONS

Test Item	Maximum $\Delta \Omega$ +0.05 Ω (Tolerance)			Condition
	A	B, C	D, F	
Short Time Overload	$\pm 0.1\%$	$\pm 0.1\%$	$\pm 0.5\%$	2.5 times of the rated voltage shall be applied for 5 seconds
Load Life	$\pm 0.1\%$	$\pm 0.25\%$	$\pm 0.5\%$	The resistor shall be subjected to rated voltage for 90 min. followed by a pause of 30 min. at a temperature of 70 \pm 3 $^{\circ}$ C. This constitutes 1 cycle. Cycles shall be repeated for 1000 hours.
Moisture Load Life	$\pm 0.1\%$	$\pm 0.25\%$	$\pm 0.5\%$	The resistor subjected to rated voltage for 90 min followed by a pause for 30 min at a temperature of 60 \pm 2 $^{\circ}$ C with relative humidity of 90% to 95%. This constitutes 1 cycle. Cycles shall be repeated for 1000 hours.
Temperature Cycle	$\pm 0.1\%$	$\pm 0.1\%$	$\pm 0.5\%$	[-55 $^{\circ}$ C 30 min \rightarrow +125 $^{\circ}$ C 30 min \rightarrow R.T. 3 min] The resistor shall be subjected to 5 continuous cycles
Resistance to Solder Heat	$\pm 0.05\%$	$\pm 0.1\%$	$\pm 0.5\%$	The resistor shall withstand dipped into solder for 10 \pm 1 sec. At 260 \pm 5 $^{\circ}$ C
Terminal Strength	$\pm 0.1\%$	$\pm 0.1\%$	$\pm 0.5\%$	Distance between fulcrums: 90mm; Bending width: 3 mm
Solderability	A new uniform coating of solder shall cover minimum of 95% of surface being immersed			The resistor shall be dipped into the solder of 235 \pm 5 $^{\circ}$ C for 3 \pm 0.5 seconds
Insulation Resistance	DC 500V for 1 minute			1000 Meg Ω or over

VALUE MARKING

For those parts ordered with an E-24 value, the product will be marked with a 3 digit code. For those products ordered with an E-96 value, the product will be marked with a 4 digit code. For those parts which fall under E-96 and E-24 values (e.g. 1K ohm is both an E-96 and E-24 value), the part will be marked with a 3 digit code; 4 digit markings for this type is available upon special request.



0201, and 0402 Size
No marking
E-24 & E-96 Values
Custom Value Any Size



0603 Size
EIA 96 Digit Code of 3.32K ohm
E-96 Values



0603 ~ 2512 Sizes
EIA 3 Digit Code of 10K ohm resistor
E-24 Values, E-96 Values



0805 ~ 2512 Sizes
EIA 4 Digit Code of 121K ohm resistor
E-96 Values

LABEL DESCRIPTION

One side surface of a reel is marked with a label with the following items of information.

1. Chip Resistor
2. Part Number
3. Tolerance
4. Quantity
5. Lot number for production month/year*
6. Manufacturer's name or symbol

* The suffix "L" indicates that this item is lead free. As of September 2004, all new production items of the series CR and CJ are no longer containing tin/lead (Sn/Pb) terminals; they are lead free and in compliance with Lead Free/RoHS


PACKAGE QUANTITY

Type	0201	0402	0603	0805	1206
M	5,000	10,000	5,000	5,000	5,000
O	1,000	1,000	1,000	1,000	1,000


Type	1210	1217	2010	2020	2045	2512
B	5,000	2,000	4,000	2,000	3,000	4,000
O	1,000	1,000	1,000	1,000	1,000	1,000

REEL SCHEMATIC & DIMENSIONS (mm)

	O & M Type
	7" Reel
C	$\varnothing 13 \pm 0.2$
E	60 \pm 0.5
F	11.4 \pm 1.0
G	9.0 \pm 0.3
H	1.5 \pm 0.3
M	$\varnothing 180 \pm 2.0$



Reel size is dependent upon the package quantity & resistor size. Call for more info.

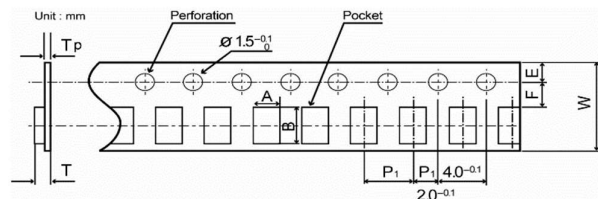TAPE SCHEMATIC


Direction of Tape Flow

TAPE DIMENSIONS (mm)

	0201	0402	0603	0805	1206
A	0.41 \pm 0.1	0.65 \pm 0.1	1.1 \pm 0.1	1.6 \pm 0.15	2.0 \pm 0.15
B	0.71 \pm 0.1	1.15 \pm 0.1	1.9 \pm 0.1	2.4 \pm 0.2	3.6 \pm 0.2
W	8.0 \pm 0.2	8.0 \pm 0.2	8.0 \pm 0.2	8.0 \pm 0.2	8.0 \pm 0.2
E	1.75 \pm 0.10	1.75 \pm 0.10	1.75 \pm 0.1	1.75 \pm 0.1	1.75 \pm 0.1
F	3.5 \pm 0.05	3.5 \pm 0.05	3.5 \pm 0.05	3.5 \pm 0.05	3.5 \pm 0.05
P ₁	2.0 \pm 0.05	2.0 \pm 0.05	4.0 \pm 0.1	4.0 \pm 0.1	4.0 \pm 0.1
T	0.5 _{max}	0.55 \pm 0.1	0.64 \pm 0.1	0.84 \pm 0.1	0.84 \pm 0.1
T _p	0.4 \pm 0.05	0.40 \pm 0.05			

	1210	1217	2010	2020	2045	2512
A	2.9 \pm 0.1	3.5 \pm 0.1	2.9 \pm 0.1	5.5 \pm 0.1	5.4 \pm 0.1	2.9 \pm 0.1
B	3.5 \pm 0.1	4.9 \pm 0.1	5.3 \pm 0.1	5.5 \pm 0.1	11.9 \pm 0.1	5.3 \pm 0.1
W	8.0 \pm 0.2	12.0 \pm 0.2	12.0 \pm 0.2	12.0 \pm 0.2	24.0 \pm 0.2	12.0 \pm 0.2
E	1.75 \pm 0.1	1.75 \pm 0.1	1.75 \pm 0.1	1.75 \pm 0.1	1.75 \pm 0.1	1.75 \pm 0.1
F	3.5 \pm 0.05	5.5 \pm 0.1	5.5 \pm 0.1	5.5 \pm 0.1	11.5 \pm 0.1	5.5 \pm 0.05
P ₁	4.0 \pm 0.1	8.0 \pm 0.1	4.0 \pm 0.1	8.0 \pm 0.1	8.0 \pm 0.1	4.0 \pm 0.1
T	0.90 \pm 0.1	0.90 \pm 0.1	1.0 \pm 0.1	1.0 \pm 0.1	1.0 \pm 0.1	1.0 \pm 0.1
T _p	0.75 \pm 0.1		0.25 \pm 0.1			0.25 \pm 0.1

The content of this specification may change without notification
05/15/2015