




End launch Waveguide to Coaxial Adapter

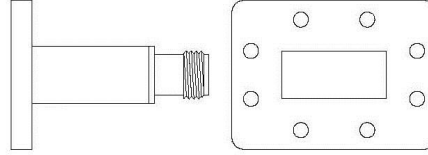

WR430 to WR90

P/N	Frequency Range (GHz)	Waveguide	VSWR	Flange	Connector	Material
430EWAN	1.70-2.60	WR430	1.25	FDP22/FDM22	N-F	Al
340EWAN	2.20-3.30	WR340	1.25	FDP26/FDM26	N-F	Al
340EWAS	2.20-3.30	WR340	1.25	FDP26/FDM26	SMA-F	Al/Cu
284EWAN	2.60-3.95	WR284	1.25	FDP32/FDM32	N-F	Al/Cu
284EWAS	2.60-3.95	WR284	1.25	FDP32/FDM32	SMA-F	Al/Cu
229EWAN	3.30-4.90	WR229	1.25	FDP40/FDM40	N-F	Al/Cu
229EWAS	3.30-4.90	WR229	1.25	FDP40/FDM40	SMA-F	Al/Cu
187EWAN	3.95-5.85	WR187	1.25	FDP48/FDM48	N-F	Al/Cu
187EWAS	3.95-5.85	WR187	1.25	FDP48/FDM48	SMA-F	Al/Cu
159EWAN	4.90-7.05	WR159	1.25	FDP58/FDM58	N-F	Al/Cu
159EWAS	4.90-7.05	WR159	1.25	FDP58/FDM58	SMA-F	Al/Cu
137EWAN	5.85-8.20	WR137	1.25	FDP70/FDM70	N-F	Al/Cu
137EWAS	5.85-8.20	WR137	1.25	FDP70/FDM70	SMA-F	Al/Cu
112EWAN	7.05-10.0	WR112	1.25	FBP84/FBM84/FBE84	N-F	Al/Cu
112EWAS	7.05-10.0	WR112	1.25	FBP84/FBM84/FBE84	SMA-F	Al/Cu
90EWAN	8.20-12.4	WR90	1.25	FBP100/FBM100/FBE100	N-F	Al/Cu
90EWAS	8.20-12.4	WR90	1.25	FBP100/FBM100/FBE100	SMA-F	Al/Cu




American Accurate Components, Inc.

188 Technolgy Drive, Unit H Irvine, CA 92618
 TEL: 949-453-9888 ♦ FAX: 949-453-8889 ♦ Email: sales@aacix.com



End launch Waveguide to Coaxial Adapter

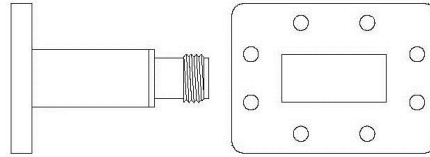

WR75 to WR22

P/N	Frequency Range (GHz)	Waveguide	VSWR	Flange	Connector	Material
75EWAN	10.0-15.0	WR75	1.25	FBP120/FBM120/FBE120	N-F	Al/Cu
75EWAS	10.0-15.0	WR75	1.25	FBP120/FBM120/FBE120	SMA-F	Al/Cu
62EWAN	12.4-18.0	WR62	1.25	FBP140/FBM140/FBE140	N-F	Al/Cu
62EWAS	12.4-18.0	WR62	1.25	FBP140/FBM140/FBE140	SMA-F	Al/Cu
51EWAS	15.0-22.0	WR51	1.25	FBP180/FBM180/FBE180	SMA-F	Al/Cu
51EWAK	15.0-22.0	WR51	1.25	FBP180/FBM180/FBE180	2.92K-F	Al/Cu
42EWAS	18.0-26.5	WR42	1.50	FBP220/FBM220/FBE220	SMA-F	Al/Cu
42EWAK	18.0-26.5	WR42	1.50	FBP220/FBM220/FBE220	2.92K -F	Al/Cu
34EWAS	22.0-33.0	WR34	1.50	FBP260/FBM260/FBE260	SMA-F	Al/Cu
34EWAK	22.0-33.0	WR34	1.50	FBP260/FBM260/FBE260	2.92K -F	Al/Cu
28EWAS	26.5-40.0	WR28	1.50	FBP320/FBM320/FBE320	SMA-F	Al/Cu
28EWAK	26.5-40.0	WR28	1.50	FBP320/FBM320/FBE320	2.92K-F	Al/Cu
22EWA2.4	33.0-50.0	WR22	2.00	FUGP400	2.4mm-F	Cu

Specification may change without notice