




RF Power Amplifier

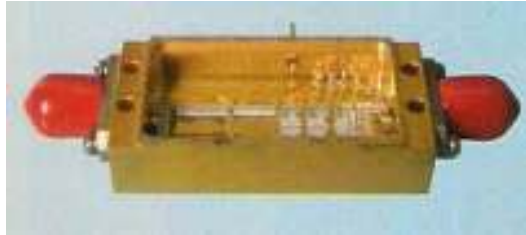

P/N	Freq. Range (GHz)	Gain (dB) Typ.	Pout @1dB (dBm) Min.	Flatness (dB) Max.	IP3 (dBm) Typ.	Power Supply +12V/(mA) Typ.	Connectors
AEMPA-2060-3030	2-6	30	30	-	-	1200	SMA
AEMPA-60180-3030	6-18	30	30	-	-	2000	SMA
AEMPA-60180-4030	6-18	40	30	-	-	1300	SMA
AEMPA-80180-4030	8-18	40	30	±4.0	40	2000	SMA
AEMPA-80120-4030	8-12	40	30	±2.0	40	2000	SMA
AEMPA-12180-4030	12-18	40	30	±2.0	40	2000	SMA

Operating Temperature: -55 °C to +85 °C, Storage Temperature: -60 °C to +90 °C.

Customized available.

Specification may change without notice