
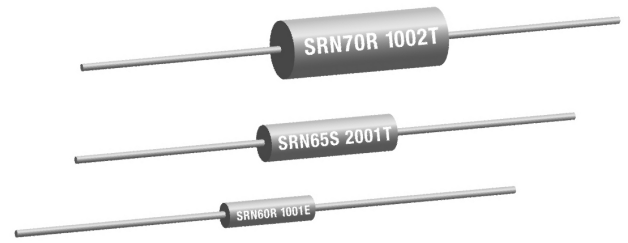


HOW TO ORDER:

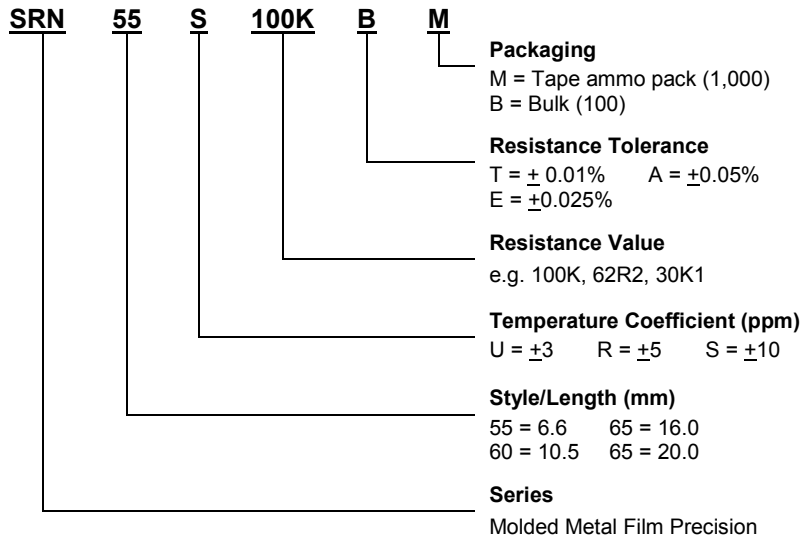


FEATURES

- High Stability and High Reliability
- Very low TCR: $\pm 3\text{ppm}/^\circ\text{C}$ to $\pm 10\text{ppm}/^\circ\text{C}$
- Superior resistance tolerance: $\pm 0.01\%$ to $\pm 0.05\%$
- Insulated constructions by epoxy molding

DIMENSIONS (mm)

Type	L	D	ℓ	d
SRN55	6.6 ± 0.5	3.4 ± 0.2	38 ± 3	0.6 ± 0.05
SRN60	10.5 ± 0.5	3.9 ± 0.2	38 ± 3	0.6 ± 0.05
SRN65	16.0 ± 0.5	5.3 ± 0.3	38 ± 3	0.6 ± 0.05
SRN70	20.0 ± 0.5	7.0 ± 0.5	38 ± 3	0.8 ± 0.05

SCHEMATIC



STANDARD ELECTRICAL SPECIFICATION

Series	Power Rating (Watts) @ 70°C	Voltage		TCR (ppm/°C)	Resistance Value Range (Ω) in Tolerance (%)		
		Max Working	Max Overload		$\pm 0.01\%$	$\pm 0.025\%$	$\pm 0.050\%$
SRN55	0.100	200	400	± 3	100 ~ 100K	100 ~ 100K	100 ~ 100K
				$\pm 5, \pm 10$	49.9 ~ 100K	49.9 ~ 100K	49.9 ~ 100K
SRN60	0.125	250	500	± 3	100 ~ 100K	100 ~ 100K	100 ~ 100K
				± 5	49.9 ~ 511K	49.9 ~ 511K	49.9 ~ 511K
				± 10	49.9 ~ 511K	49.9 ~ 1.00M	49.9 ~ 1.00M
				± 3	100 ~ 100K	100 ~ 100K	100 ~ 100K
SRN65	0.250	300	600	± 5	49.9 ~ 511K	49.9 ~ 511K	49.9 ~ 511K
				± 10	49.9 ~ 511K	49.9 ~ 1.00M	49.9 ~ 1.00M
SRN70	0.500	350	700	± 3	100 ~ 100K	100 ~ 100K	100 ~ 100K
				± 5	49.9 ~ 1.00M	49.9 ~ 1.00M	49.9 ~ 1.00M
				± 10	49.9 ~ 1.00M	49.9 ~ 1.00M	49.9 ~ 3.52M

CHARACTERISTICS

ITEM	TEST METHOD	REQUIREMENTS
Operating Temperature Range		-25°C to +125°C
Short Time Overload	2.5 X rated voltage; 5 seconds	$\pm (0.05\% + 0.01\Omega)$
Insulation Resistance	100V or 500V; 1 minute	100,000M Ω or more
Dielectric withstanding Voltage	SRN55, SRN60: 450V SRN65, SRN70: 900V } for 1 minute	$\pm (0.05\% + 0.01\Omega)$
Terminal Strength	Pull 10 seconds; Twist 360°, 5 times SRN55, SRN60, SRN65: 10N and SRN70: 25N	$\pm (0.02\% + 0.01\Omega)$
Vibration	10 to 2,000Hz, 1.5 mm or 20G, 2 directions; total 8 hours	$\pm (0.05\% + 0.01\Omega)$
Resistance to Soldering Heat	350 \pm 10°C, 3 seconds	$\pm (0.05\% + 0.01\Omega)$
Low Temperature Operation	-65°C, rated voltage 45 minutes	$\pm (0.05\% + 0.01\Omega)$
Thermal Shock	-65°C, -150°C for 5 cycles	$\pm (0.05\% + 0.01\Omega)$
Moisture Resistance	65°C, 90 ~ 95% R.H. -10°C, 10 cycles	$\pm (0.2\% + 0.01\Omega)$
Moisture Resistance Load Life	40°C, 90 ~ 95% R.H. rated voltage, 1,000 hours	$\pm (0.2\% + 0.01\Omega)$
Load Life at 70°C	70°C, rated voltage, 1.5 hours on, 0.5 hours off, 1,000 hours	$\pm (0.2\% + 0.01\Omega)$

The content of this specification may change without notification 1/01/2006