




Substrate Isolator

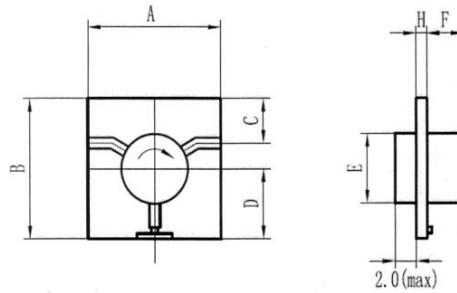

P/N	Freq. Range (GHz)	Insertion Loss (dB) Max.	Isolation (dB) Min.	VSWR Max.	Size (mm)
					C x D x E x F
AEMSBIL-J-3600-4200	3.6-4.2	0.4	20	1.20	5.0x10.0x3.0x9.5
AEMSBIL-J-4400-5000-A	4.4-5.0	0.4	20	1.22	3.0x10.5x3.0x11.0
AEMSBIL-J-4400-5000-B	4.4-5.0	0.4	20	1.20	4.0x6.3x3.5x6.5
AEMSBIL-J-5900-6500	5.9-6.5	0.4	20	1.20	4.0x6.3x3.0x6.5
AEMSBIL-J-6400-7170	6.4-7.17	0.4	20	1.20	4.0x6.3x3.0x6.5
AEMSBIL-J-7100-7700-20	7.1-7.7	0.4	20	1.20	4.0x6.3x3.0x6.5
AEMSBIL-J-7100-7700-18	7.1-7.7	0.5	18	1.25	4.0x6.3x3.0x6.5
AEMSBIL-J-7700-8500-20	7.7-8.5	0.4	20	1.20	4.0x6.3x3.0x6.5
AEMSBIL-J-7700-8500-18	7.7-8.5	0.5	18	1.25	4.0x6.3x3.0x6.5
AEMSBIL-J-10500-13000-20	10.5-13.0	0.4	20	1.25	2.85x7.95x3.0x3.7
AEMSBIL-J-10500-13000-16	10.5-13.0	0.6	16	1.30	2.85x7.95x3.0x3.7

Customized available

Specification may change without notice