




Waveguide Twist

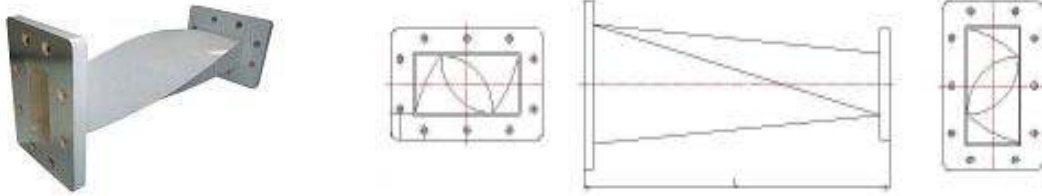

P/N	Frequency Range (GHz)	Waveguide	VSWR	Length (mm)	Flange	Material
430TW-800	1.70-2.60	WR430	1.10	800	FDP22/FDM22	Al
340TW-500	2.20-3.30	WR340	1.10	500	FDP26/FDM26	Al
284TW-300	2.60-3.95	WR284	1.10	300	FDP32/FDM32	Al/Cu
229TW-250	3.30-4.90	WR229	1.10	250	FDP40/FDM40	Al/Cu
187TW-200	3.95-5.85	WR187	1.10	200	FDP48/FDM48	Al/Cu
159TW-200	4.90-7.05	WR159	1.10	200	FDP58/FDM58	Al/Cu
137TW-150	5.85-8.20	WR137	1.10	150	FDP70/FDM70	Al/Cu
112TW-120	7.05-10.0	WR112	1.10	120	FBP84/FBM84/FBE84	Al/Cu
90TW-100	8.20-12.4	WR90	1.10	100	FBP100/FBM100/FBE100	Al/Cu
75TW-90	10.0-15.0	WR75	1.10	90	FBP120/FBM120/FBE120	Al/Cu
62TW-75	12.4-18.0	WR62	1.10	75	FBP140/FBM140/FBE140	Al/Cu
51TW-70	15.0-22.0	WR51	1.10	70	FBP180/FBM180/FBE180	Al/Cu
42TW-60	18.0-26.5	WR42	1.10	60	FBP220/FBM220/FBE220	Al/Cu
34TW-55	22.0-33.0	WR34	1.10	55	FBP260/FBM260/FBE260	Al/Cu
28TW-55	26.5-40.0	WR28	1.10	55	FBP320/FBM320/FBE320	Al/Cu
22TW-50	33.0-50.0	WR22	1.10	50	FUGP400	Cu
19TW-50	40.0-60.0	WR19	1.10	50	FUGP500	Cu
15TW-50	50.0-75.0	WR15	1.10	50	FUGP620	Cu
12TW-50	60.0-90.0	WR12	1.10	50	FUGP740	Cu
10TW-50	75.0-110.0	WR10	1.10	50	FUGP900	Cu

Customized Available

Specification may change without notice



188 Technolgoy Drive, Unit H Irvine, CA 92618
 TEL: 949-453-9888 ♦ FAX: 949-453-8889 ♦ Email: sales@aacix.com