




Waveguide Variable Attenuator

Waveguide Variable Attenuator

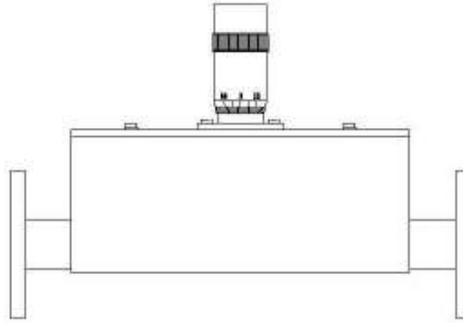

P/N	Frequency Range (GHz)	Waveguide	Attenuation (dB)	VSWR	Flange	Material
90VWA-XX	8.20-12.40	WR90	0-30	1.25	FBP100/FBM100/FBE100	Al/Cu
75VWA-XX	10.0-15.0	WR75	0-30	1.25	FBP120/FBM120/FBE120	Al/Cu
62VWA-XX	12.4-18.0	WR62	0-30	1.25	FBP140/FBM140/FBE140	Al/Cu
51VWA-XX	15.0-22.0	WR51	0-30	1.25	FBP180/FBM180/FBE180	Al/Cu
42VWA-XX	18.0-26.5	WR42	0-30	1.25	FBP220/FBM220/FBE220	Al/Cu
34VWA-XX	22.0-33.0	WR34	0-30	1.25	FBP260/FBM260/FBE260	Al/Cu
28VWA-XX	26.5-40.0	WR28	0-30	1.25	FBP320/FBM320/FBE320	Al/Cu

Specification may change without notice