




Waveguide Right Angle to Coaxial Adapter

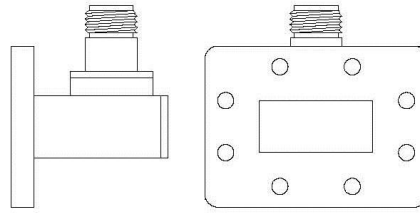

WR975 to WR75

P/N	Frequency Range (GHz)	Waveguide	VSWR	Flange	Connector	Material
975RWAN	0.75-1.12	WR975	1.25	FDP9/FDM9	N-F	Al
770RWAN	0.96-1.45	WR770	1.25	FDP12/FDM12	N-F	Al
650RWAN	1.12-1.70	WR650	1.25	FDP14/FDM14	N-F	Al
510RWAN	1.45-2.20	WR510	1.25	FDP18/FDM18	N-F	Al
430RWAN	1.70-2.60	WR430	1.25	FDP22/FDM22	N-F	Al
340RWAN	2.20-3.30	WR340	1.25	FDP26/FDM26	N-F	Al
284RWAN	2.60-3.95	WR284	1.25	FDP32/FDM32	N-F	Al/Cu
229RWAN	3.30-4.90	WR229	1.25	FDP40/FDM40	N-F	Al/Cu
229RWAS	3.30-4.90	WR229	1.25	FDP40/FDM40	SMA-F	Al/Cu
187RWAN	3.95-5.85	WR187	1.25	FDP48/FDM48	N-F	Al/Cu
187RWAS	3.95-5.85	WR187	1.25	FDP48/FDM48	SMA-F	Al/Cu
159RWAN	4.90-7.05	WR159	1.25	FDP58/FDM58	N-F	Al/Cu
159RWAS	4.90-7.05	WR159	1.25	FDP58/FDM58	SMA-F	Al/Cu
137RWAN	5.85-8.20	WR137	1.25	FDP70/FDM70	N-F	Al/Cu
137RWAS	5.85-8.20	WR137	1.25	FDP70/FDM70	SMA-F	Al/Cu
112RWAN	7.05-10.0	WR112	1.25	FBP84/FBM84/FBE84	N-F	Al/Cu
112RWAS	7.05-10.0	WR112	1.25	FBP84/FBM84/FBE84	SMA-F	Al/Cu
90RWAN	8.20-12.4	WR90	1.25	FBP100/FBM100/FBE100	N-F	Al/Cu
90RWAS	8.20-12.4	WR90	1.25	FBP100/FBM100/FBE100	SMA-F	Al/Cu
75RWAN	10.0-15.0	WR75	1.25	FBP120/FBM120/FBE120	N-F	Al/Cu
75RWAS	10.0-15.0	WR75	1.25	FBP120/FBM120/FBE120	SMA-F	Al/Cu



Right Angle Waveguide to Coaxial Adapter



WR62 to WR19

P/N	Frequency Range (GHz)	Waveguide	VSWR	Flange	Connector	Material
62RWAN	12.4-18.0	WR62	1,25	FBP140/FBM140/FBE140	N-F	Al/Cu
62RWAS	12.4-18.0	WR62	1.25	FBP140/FBM140/FBE140	SMA-F	Al/Cu
51RWAS	15.0-22.0	WR51	1.25	FBP180/FBM180/FBE180	SMA-F	Cu
51RWAK	15.0-22.0	WR51	1.25	FBP180/FBM180/FBE180	2.92K-F	Cu
42RWAS	18.0-26.5	WR42	1.50	FBP220/FBM220/FBE220	SMA-F	Cu
42RWAK	18.0-26.5	WR42	1.50	FBP220/FBM220/FBE220	2.92K-F	Cu
34RWAS	22.0-33.0	WR34	1.50	FBP260/FBM260/FBE260	SMA-F	Cu
34RWAK	22.0-33.0	WR34	1.50	FBP260/FBM260/FBE260	2.92K-F	Cu
28RWAS	26.5-40.0	WR28	1.50	FBP320/FBM320/FBE320	SMA-F	Cu
28RWAK	26.5-40.0	WR28	1.50	FBP320/FBM320/FBE320	2.92K-F	Cu
22RWA2.4	33.0-50.0	WR22	1.50	FUGP400	2.4mm-F	Cu
22RWAV	33.0-50.0	WR22	1.50	FUGP400	1.85mm-F	Cu
19RWAV	40.0-60.0	WR19	1.50	FUGP500	1.85mm-F	Cu

Specification may change without notice